

Tri-Break® Line

- Integrally Fused Thermal Magnetic Circuit Breakers
- Integrally Fused Magnetic Circuit Breakers
- Integrally Fused Molded Case Switches

These breakers are available in three types. Type TB1 (15-100 amperes) product numbers include frame, trip, line and load lugs, and current limiters all factory assembled. TB6 (300 to 600 amperes) and TB8 (600 to 800 amperes) include frame, trip and limiters, factory assembled, but do not include line or load lugs. If line and load lugs are required, order separately. Unless otherwise noted, TB1, TB6, and TB8 breaker components are UL listed in File E-42263. Fused molded case switches are UL listed in File E-57546.

Mag-Break Line

- Magnetic only circuit breakers (motor circuit protectors)

These breakers are available only with noninterchangeable adjustable magnetic trip, in frame Types E, F, J, K, and Tri-Break®. All breakers are shipped factory assembled, complete with Cu/Al line and load lugs.

All magnetic only circuit breakers and limiters are UL Component Recognized in Files E-11592 and E-66390, respectively, unless otherwise noted.

Spectra® RMS

- Circuit Breakers

Determine the required breaker frame, IC rating, and load requirements. Select frame, trip unit (rating plug), and lug, if required, product numbers from the tables on pages 3-46 to 3-54. For Spectra® breakers with MicroVersaTrip® Plus or MicroVersaTrip® PM Trip Units refer to pages 3-57 through 3-65. Select field-mounted internal accessory product numbers, if required, on pages 3-70 and 3-71. Select field-mounted external accessory product numbers, if required, on pages 3-97 through 3-107 and pages 3-66 to 3-69 for Spectra® breakers with MicroVersaTrip® Plus or MicroVersaTrip® PM Trip Units. Order as separate items.

- Mag-Break Motor Circuit Protectors

Determine the required frame and ampere requirements. Select frame, trip unit (rating plug), and lug, if required, product numbers from the table on pages 3-73 through 3-75. Select accessories as noted above for circuit breakers. The same accessories are used with both circuit breakers and motor circuit protectors. Order as separate items.

- Molded Case Switches

Determine the required frame and ampere requirements. Select frame and lug, if required, product numbers from the table on page 3-72. Rating plugs are not used. Select accessories as noted above for circuit breakers. Internal accessories do not require dummy trips. The same accessories are used with both circuit breakers and molded case switches. Order as separate items.

Unless otherwise noted, all circuit breakers are UL listed in File E-11592. Molded case switches are UL listed in File E-57546. Field-Installable Internal Accessories are UL listed in File E-57253. Distribution Cable Accessories for MicroVersaTrip® Plus Trip Units and MicroVersaTrip® PM Trip Units are UL listed in File E-57253.

Accessories

Order accessories from the appropriate table:

- Thermal Magnetic Circuit Breakers, Magnetic Circuit Breakers, and Molded Case Switches¹—pages 3-39 to 3-45 and 3-97 to 3-107.
- Spectra® RMS Breakers—pages 3-70 to 3-71 and 3-97 to 3-107.
- Spectra® RMS Breakers with MicroVersaTrip® Plus Trip Units or MicroVersaTrip® PM Trip Units—pages 3-66 to 3-71, and 3-96 to 3-107.

¹Installation of accessories in molded case switches requires dummy trip; see page 3-45 for information. Dummy trip not required for Tri-Break® or Q-Line molded case switches.

Molded Case Circuit Breaker and Switch Terminal Configuration Code

Order standard Cu/Al lugs by using suffix codes presented. Order lugs separately if special lugs are required. For optional lugs, see pages 3-101 and 3-102.

Breaker/Switch Type	Suffix				
	Blank	WL	XL	X2	LL
TQD/TJD	Load Lugs Only	Line and Load Lugs	—	Line Lugs Only	No Lugs
Molded Case Breakers, Thermal Magnetic	Load Lugs Only	Line and Load Lugs	—	Load Lugs Only	No Lugs
Molded Case Switch	Line and Load Lugs	—	No Lugs	Line Lugs Only	Load Lugs Only
Spectra RMS™ Breakers	No Lugs			Order Lugs Separately	
Mine Duty™ Breakers	No Lugs			Order Lugs Separately	
Mag-Break® Breakers	Line and Load Lugs	—	—	—	—




Molded Case Circuit Breakers Industrial Circuit Breakers

Quick Reference Guide

15-1200A Circuit Breakers

Electric Trip Spectra® RMS Breakers

Ratings do not apply to molded case switches. The interruption ratings and voltages shown in the table are maximum ratings. A circuit breaker of the type given in the left-hand column may be applied at the given circuit voltage in any electrical distribution system where the available fault current at the load terminals of the breaker does not exceed the value in the table. That circuit breaker type may also be applied at intermediate values of circuit voltage provided the available fault current at the load terminals of the breaker does not exceed the value in the table for the higher value of voltage.



SE 150

Spectra® RMS Circuit Breakers UL/CSA Ratings

Solid-State with Interchangeable Trip Unit (Rating Plug)

Circuit Breaker Type	Ampere Rating	No. Poles	Maximum Vac	UL Listed Interrupting Rating—kA			Dimensions Inches (mm)							Approx. Ship Wt./Std. Pack
				240 Vac	480 Vac	600 Vac	H	W	D	A	B	C	E	
SE150 Current Limiting (UL File No. E-11592; CSA LR 40350)¹														
SED ²	15-150	2	480	18	18	—	6.31 (160)	4.12 (105)	3.38 (86)	2.41 (61)	2.47 (63)	.69 (18)	.72 (18)	5.65 lb/1
		3	600											
SEH ²	2	480	65	25	—									
	3	600				100	65	—						
SEL	15-150	2	480	100	65				—					
		3	600			200	100	—						
SEP	15-150	2	480	200	100				—					
		3	600			25	25	—						
SF-250 Current Limiting (UL File No. E-11592; CSA LR 40350)¹														
SFH ²	70-250	2	480	65	35	—	10.12 (257)	4.12 (105)	3.81 (97)	3.87 (98)	3.87 (98)	.69 (18)	1.19 (30)	
		3	600											100
SFL	70-250	2	480	100	65	—								
		3	600				200	100	—					
SFP	70-250	2	480	200	100	—								
		3	600				25	25	—					
SG600 Current Limiting (UL File No. E-11592; CSA LR 40350)^{1, 3}														
SGH1 ^{2,4}	60-150	3	600	65	35	25	10.09 (256)	5.50 (140)	3.81 (97)	4.45 (113)	3.30 (84)	.91 (23)	1.18 (30)	15.85 lb/1
SGD ²		125-400	2											
	3		600	65	35	25								
SGH4 ²	125-400	2	600				65	35	25					
		3	600	65	35	25								
SGH6 ²	250-600	2	600				65	35	25					
		3	600	100	65	65								
SGL1 ⁴	60-150	3	600				100	65	65					
SGP1 ⁴		3	600	200	100	65								
SGL4	125-400	2	600				100	65	65					
		3	600	200	100	65								
SGP4	125-400	2	600				200	100	65					
		3	600	100	65	65								
SGL6	250-600	2	600				100	65	65					
		3	600	200	100	65								
SGP6	250-600	2	600				200	100	65					
		3	600	25	25	—								
SK1200 (UL File No. E-11592; CSA LR 40350)^{1, 3}														
SKH8	300-800	2	600	65	50	25	15.50 (394)	8.25 (210)	5.50 (140)	8.56 (217)	5.69 (145)	1.38 (35)	.62 (16)	47.6 lb/1
		3	600											
SKL8	300-800	2	600	100	65	42								
		3	600				200	100	65					
SKP8	300-800	2	600	200	100	65								
		3	600				65	50	25					
SKH12	600-1200	2	600	65	50	25								
		3	600				100	65	42					
SKL12	600-1200	2	600	100	65	42								
		3	600				200	100	65					
SKP12	600-1200	2	600	200	100	65								
		3	600				25	25	—					

¹ UL listed as HACR (heating, air conditioning and refrigeration).

² Not current-limiting circuit breaker.

³ Includes MicroVersaTrip Plus™ Trip Units and MicroVersaTrip PM™ Trip Units.

⁴ MicroVersaTrip Plus™ Trip Units and MicroVersaTrip PM™ Trip Units only.

⁵ Add 1.76 inches (45 mm) to each end with lugs and lug cover installed.

⁶ Add 4.00 inches (101 mm) to upper end for SKP (100 KAIC-480V) lug cover.



Publications and Reference: See Section 22 for a complete list of additional product-related publications

Molded Case Circuit Breakers Industrial Circuit Breakers

Section 3

Quick Reference Guide

15-1200A Circuit Breakers

Electric Trip Spectra® RMS Breakers

Ratings do not apply to molded case switches

IEC/JIS Ratings

Solid-State with Interchangeable Trip Unit (Rating Plug)

Circuit Breaker Type	Ampere Rating	No. Poles	IEC 947-2 Interruption Capacity — kA								Japanese Industry Standard Interruption Capacity kA			
			220-240 Vac		380-415 Vac		500 Vac		690 Vac		Vac			
			I _{cu}	I _{cs}	I _{cu}	I _{cs}	I _{cu}	I _{cs}	I _{cu}	I _{cs}	220-240	380-415	500	690

SE150 Current Limiting, 15-32A

SED	15-32	2	18	9	10	5	—	—	—	—	18	10	—	—
		3	—	—	—	—	4	4	—	—	—	—	4	—
SEH	15-32	2	65	33	15	10	—	—	—	—	65	15	—	—
		3	—	—	—	—	6	6	—	—	—	—	6	—
SEL	15-32	2	100	50	20	15	—	—	—	—	100	20	—	—
		3	—	—	—	—	8	8	3	3	—	—	8	3
SEP	15-32	2	200	100	20	20	—	—	—	—	200	20	—	—
		3	—	—	—	—	10	10	5	5	—	—	10	5

SE150 Current Limiting, 40-160A

SED	40-160	2	18	9	14	7	—	—	—	—	18	14	—	—
		3	—	—	—	—	14	7	—	—	—	—	14	—
SEH	40-160	2	65	33	35	17	—	—	—	—	65	25	—	—
		3	—	—	—	—	25	12	—	—	—	—	18	—
SEL	40-160	2	100	50	65	33	—	—	—	—	100	65	—	—
		3	—	—	—	—	40	20	5	5	—	—	25	5
SEP	40-160	2	200	100	100	50	—	—	—	—	200	100	—	—
		3	—	—	—	—	50	25	10	5	—	—	65	10

SF250 Current Limiting

SFH	70-250	2	65	33	35	17	—	—	—	—	65	25	—	—
		3	—	—	—	—	25	12	—	—	—	—	18	—
SFL	70-250	2	100	50	65	33	—	—	—	—	100	65	—	—
		3	—	—	—	—	40	20	14	7	—	—	25	14
SFP	70-250	2	200	100	100	50	—	—	—	—	200	100	—	—
		3	—	—	—	—	65	33	18	9	—	—	65	18

SG600 Current Limiting

SGH1 ¹	60-150	3	65	33	25	13	18	9	—	—	65	25	18	—
SGL1 ¹			100	50	65	33	35	18	14	7	100	65	35	22
SGP1 ¹			200	100	100	50	50	25	18	9	200	100	65	35
SGH4	125-400	2	65	33	25	13	—	—	—	—	65	25	—	—
		3	—	—	—	—	18	9	—	—	—	—	18	—
SGL4		2	100	50	65	33	—	—	—	—	100	65	—	—
SGP4	125-400	3	—	—	—	—	35	18	14	7	—	—	35	22
		2	200	100	100	50	—	—	—	—	200	100	—	—
3		—	—	—	—	50	25	18	9	—	—	65	35	
SGH6	250-600	2	65	33	25	13	—	—	—	—	65	25	—	—
		3	—	—	—	—	18	9	—	—	—	—	18	—
SGL6		2	100	50	65	33	—	—	—	—	100	65	—	—
SGP6	250-600	3	—	—	—	—	35	18	14	7	—	—	35	22
		2	200	100	100	50	—	—	—	—	200	100	—	—
3		—	—	—	—	50	25	18	9	—	—	65	35	

SK1200

SKH8	300-800	2	65	16	50	13	25	13	—	—	65	50	25	—
		3	—	—	—	—	—	—	—	—	—	—	—	—
SKL8		2	100	25	65	16	42	21	14	14	100	65	42	14
SKP8	300-800	3	—	—	—	—	—	—	—	—	—	—	—	—
		2	140	35	85	25	50	25	18	18	140	85	50	18
3		—	—	—	—	—	—	—	—	—	—	—	—	—
SKH12	600-1250	2	65	16	50	13	25	13	—	—	65	50	25	—
		3	—	—	—	—	—	—	—	—	—	—	—	—
SKL12		2	100	25	65	21	42	16	14	14	100	65	42	14
SKP12	600-1250	3	—	—	—	—	—	—	—	—	—	—	—	—
		2	140	35	70	25	50	25	18	18	140	85	50	18
3		—	—	—	—	—	—	—	—	—	—	—	—	—

¹MicroVersaTrip Plus™ trip system only.



SE



SF



SG




SK



Molded Case Circuit Breakers Industrial Circuit Breakers

15-150A Circuit Breakers
Electronic Trip
Spectra® RMS
SE150 Line Circuit Breakers

Product Number Structure

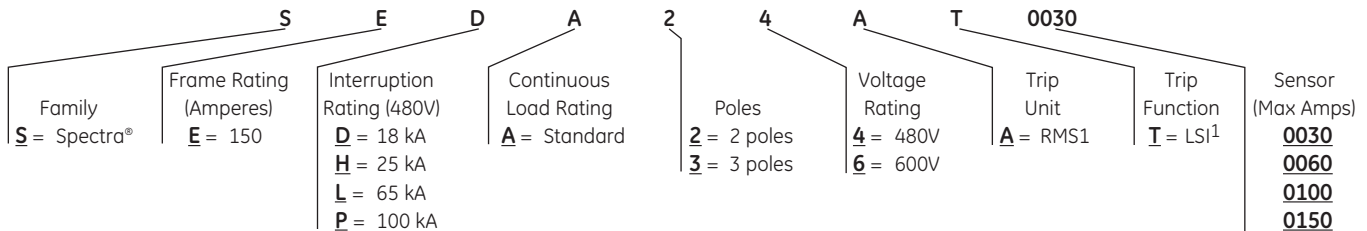

¹Adjustable Instantaneous with Tracking Short Time (Long Time established via Interchangeable Rating Plugs).
Note: This information is provided for interpreting product numbers (it should not be used to build product numbers).

SE150 Line, Suitable for Reverse Feed, UL File E-11592, CSA LR 40350 SED, SEH; 2-Pole, UL/CSA: 150A, 480 Vac Max., IEC 947-2: 160A, 415 Vac Max.

Rating Plug					Frame					Terminal Lugs for Front Connection (Cu/Al)		
Ampere Rating	Adj. Inst. Trip Range	Inst. Amps	Product Number	List Price GO-1355	UL 489 IC @480 Vac		UL 489 IC @480 Vac		Product Number	List Price GO-1355	Wire Range	
					Current Sensor	Product Number	List Price GO-1355	Product Number				List Price GO-1355
15	43	182	SRPE30A15	\$106.00	30	SEDA24AT0030	\$214.00	SEHA24AT0030	\$530.00	TCAL18	\$3.00	12-3/0 Cu 12-3/0 Al
20	58	254	SRPE30A20	\$106.00								
25	73	332	SRPE30A25	\$106.00								
30	87	415	SRPE30A30	\$106.00								
40	118	501	SRPE60A40	\$106.00								
50	148	637	SRPE60A50	\$106.00	60	SEDA24AT0060	\$214.00	SEHA24AT0060	\$530.00			
60	178	777	SRPE60A60	\$106.00								
70	206	863	SRPE100A70	\$106.00								
80	236	999	SRPE100A80	\$106.00	100	SEDA24AT0100	\$312.00	SEHA24AT0100	\$634.00			
90	267	1138	SRPE100A90	\$106.00								
100	297	1280	SRPE100A100	\$106.00								
110	328	1426	SRPE150A110	\$106.00	150	SEDA24AT0150	\$837.00	SEHA24AT0150	\$1427.00			
125	374	1640	SRPE150A125	\$106.00								
150	450	1991	SRPE150A150	\$106.00								

SE150 Line, Suitable for Reverse Feed, UL File E-11592, CSA LR 40350 SEL, SEP²; 2-Pole, UL/CSA: 150A, 480 Vac Max., IEC 947-2: 160A, 415 Vac Max.

Rating Plug					Frame					Terminal Lugs for Front Connection (Cu/Al)		
Ampere Rating	Adj. Inst. Trip Range	Inst. Amps	Product Number	List Price GO-1355	UL 489 IC @480 Vac		UL 489 IC @480 Vac		Product Number	List Price GO-1355	Wire Range	
					Current Sensor	Product Number	List Price GO-1355	Product Number				List Price GO-1355
15	43	182	SRPE30A15	\$106.00	30	SELA24AT0030	\$549.00	SEPA24AT0030	\$895.00	TCAL18	\$3.00	12-3/0 Cu 12-3/0 Al
20	58	254	SRPE30A20	\$106.00								
25	73	332	SRPE30A25	\$106.00								
30	87	415	SRPE30A30	\$106.00								
40	118	501	SRPE60A40	\$106.00								
50	148	637	SRPE60A50	\$106.00	60	SELA24AT0060	\$549.00	SEPA24AT0060	\$895.00			
60	178	777	SRPE60A60	\$106.00								
70	206	863	SRPE100A70	\$106.00								
80	236	999	SRPE100A80	\$106.00	100	SELA24AT0100	\$744.00	SEPA24AT0100	\$1179.00			
90	267	1138	SRPE100A90	\$106.00								
100	297	1280	SRPE100A100	\$106.00								
110	328	1426	SRPE150A110	\$106.00	150	SELA24AT0150	\$1808.00	SEPA24AT0150	\$2777.00			
125	374	1640	SRPE150A125	\$106.00								
150	450	1991	SRPE150A150	\$106.00								

²SEL, SEP UL current limiting.
Note: All Spectra® breakers UL listed as HACR type.
All Spectra® breakers marked CE.



Molded Case Switches Spectra® RMS

UL File E-57546, CSA LR 91464

Includes fixed, high-set instantaneous trip suitable for reverse feed.

Frame Type	Switch ¹		Terminal Lugs for Front Connection (Cu/Al)			Maximum Short Circuit Withstand Rating ² (kA rms symmetrical)			
	Ampere Rating	Product Number	List Price GO-135S	Product Number	List Price GO-135S	Wire Range	240 Vac	480 Vac	600 Vac
SE150	100	SEDA36AN0100	\$650.00	TCAL18	\$3.00	Aluminum: #12-3/0 Copper: #14-3/0	200	100	25
	150	SEDA36AN0150	\$948.00						
SF250	250	SFDA36AN0250	\$1126.00	TCAL29	\$8.00	Aluminum: #8-350 kcmil Copper: #8-350 kcmil	200	100	25
SG600	400	SGDA36AN0400	\$1813.00	3-pole lug kit	\$42.00	Aluminum: (2) 2/0-500 kcmil or (1) #8-600 kcmil Copper: (2) 2/0-500 kcmil or (1) #8-600 kcmil	200	100	65
	600	SGDA36AN0600	\$2489.00	TCLK365 ³					
SK1200	800	SKDA36AN0800	\$2483.00	TCAL81	\$47.00	Aluminum: (3) 3/0-500 kcmil Copper: (3) 3/0-500 kcmil	100	65	42
	1000	SKDA36AN1000	\$3600.00	TCAL125	\$76.00	Aluminum: (4) 250-500 kcmil Copper: (4) 250-500 kcmil			
	1200	SKDA36AN1200	\$3600.00						

¹No rating plug required.

²The maximum withstand rating is limited by the application to the value set forth in this table or the short circuit rating of the upstream fuse or circuit breaker, whichever is less. The upstream protective device must have an instantaneous trip function or element and its rated ampacity may not exceed the ampere rating of the switch.

³Order one kit for either line or load end; two kits required for both.

Nonautomatic Trip, Includes Cu/Al line and load lugs. For optional lugs, see page 3-105 and 3-106.

Type	Ampere Rating	Number of Poles	Voltage Rating	Product Number	List Price GO-135B
TEB	100	1	120 Vac, 125 Vdc	TEB111Y100 ⁴	\$65.50
TEB	100	2	240 Vac, 250 Vdc	TEB122Y100 ⁴	\$159.00
TEB	100	3	240 Vac	TEB132Y100 ⁴	\$240.00
TED	100	1	277 Vac, 125 Vdc	TED113Y100 ⁴	\$82.50
TED	100	2	480 Vac, 250 Vdc	TED124Y100 ⁴	\$263.00
TED	150	2	480 Vac, 250 Vdc	TED124Y150 ^{4,5}	\$708.00
TFJ	225	2	480 Vac	TFJ226Y225 ^{4,6}	\$803.00 ⁹
TFJ	225	3	600 Vac	TFJ236Y225	\$1174.00 ⁹
TJJ	400	2	600 Vac, 250 Vdc	TJJ426Y400 ⁷	\$1577.00 ⁹
TJJ	400	3	600 Vac	TJJ436Y400 ⁷	\$1904.00 ⁹

Nonautomatic Trip, Includes Cu/Al line and load lugs. For optional lugs, see page 3-105 and 3-106.

Type	Ampere Rating	Number of Poles	Voltage Rating	Product Number	List Price GO-135LG
TFK	225	2	480 Vac, 250 Vdc	TFK226Y225 ^{6,7,8}	\$937.00
TFK	225	3	600 Vac, 250 Vdc	TFK236Y225 ^{7,8}	\$1174.00
TJK	400	2	600 Vac, 250 Vdc	TJK426Y400 ⁷	\$1874.00
TJK	400	3	600 Vac, 250 Vdc	TJK436Y400 ⁷	\$2330.00
TJK	600	2	600 Vac, 250 Vdc	TJK626Y600 ⁷	\$1844.00
TJK	600	3	600 Vac, 250 Vdc	TJK636Y600 ⁷	\$2595.00
TKM	800	2	600 Vac, 250 Vdc	TKMA826Y800 ⁷	\$1692.00
TKM	800	3	600 Vac, 250 Vdc	TKMA836Y800 ⁷	\$2769.00
TKM	1000	2	600 Vac, 250 Vdc	TKMA2Y1000 ⁷	\$3311.00
TKM	1000	3	600 Vac, 250 Vdc	TKMA3Y1000 ⁷	\$4030.00
TKM	1200	2	600 Vac, 250 Vdc	TKMA2Y1200 ⁷	\$3420.00
TKM	1200	3	600 Vac, 250 Vdc	TKMA3Y1200 ⁷	\$4191.00

⁴Internal accessory requires factory installed dummy trip. Specify on order. Accessories not available for one-pole TEB, TED.

⁵Not UL listed.

⁶600 Volts max.

⁷Internal accessory requires factory installed dummy trip unit. See page 3-45 for additional details. Nonautomatic trip unit and dummy trip not UL listed for field installation.

⁸UL listed only when ordered as a complete switch.

⁹GO-135LG.

