

Molded Case Circuit Breakers

JD 400A Frame Sentron Series

Selection

Type HJD6-A, HJXD6-A^{②④⑥}

Black Label

Interchangeable Trip

Continuous Current Rating @ 40°C	Complete Breaker Unassembled with Lugs		Frame Only		Trip Unit Only	
	Catalog Number	List Price \$	Catalog Number	List Price \$	Catalog Number	List Price \$

2-Pole 600V AC, 250V DC (3 Pole Width)

200	HJD62B200■		HJD62F400■		JD62T200■	
225	HJD62B225■				JD62T225■	
250	HJD62B250■				JD62T250■	
300	HJD62B300■				JD62T300■	
350	HJD62B350■				JD62T350■	
400	HJD62B400■				JD62T400■	

3-Pole 600V AC, 500V DC^{①②⑤}

200	HJD63B200■		HJD63F400■		JD63T200■	
225	HJD63B225■				JD63T225■	
250	HJD63B250■				JD63T250■	
300	HJD63B300■				JD63T300■	
350	HJD63B350■				JD63T350■	
400	HJD63B400■				JD63T400■	

Type HHJD6, HHJXD6-A^{②④⑥}

2-Pole 600V AC (3 Pole Width)

Black Label

200	HHJD62B200■		HHJD62F400■		JD62T200■	
225	HHJD62B225■				JD62T225■	
250	HHJD62B250■				JD62T250■	
300	HHJD62B300■				JD62T300■	
350	HHJD62B350■				JD62T350■	
400	HHJD62B400■				JD62T400■	

200	HHJD63B200■		HHJD63F400■		JD63T200■	
225	HHJD63B225■				JD63T225■	
250	HHJD63B250■				JD63T250■	
300	HHJD63B300■				JD63T300■	
350	HHJD63B350■				JD63T350■	
400	HHJD63B400■				JD63T400■	

Type CJD6^⑥


Fuseless Current Limiting

Red Label

Non-Interchangeable Trip (Assembled Circuit Breakers Without Lugs)

Continuous Current Rating @ 40°C	2-Pole		3-Pole	
	600V AC/250V DC		600V AC/500V DC	
	Catalog Number	List Price \$	Catalog Number	List Price \$
200			CJD63B200■	
225			CJD63B225■	
250			CJD63B250■	
300			CJD63B300■	
350			CJD63B350■	
400			CJD63B400■	

For 2-pole application use outside poles of 3-pole circuit breaker

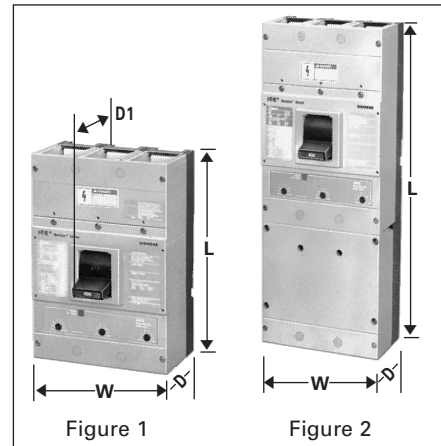

Dimensions (in inches)

Breaker Type	W	L	D	To Handle D1
Figure 1 JXD2-A, JXD6-A, JD6-A HJD6-A, HJXD6-A, HHJD6, HJD6, HJXD6, HHJXD6, JXD6-ETI ^⑥	7.5	11	4	5.44
Figure 2 CJD6, CJD6-ETI ^⑥	7.5	17.86	4	5.44

Enclosures

Type	Catalog Number	List Price \$
1 3R 12 4X 7, 9 (200-250A) 7, 9 (300-400A)	J6N1 J6N3R J6N12 LD6SS4 EC4 EE	
Neutral	W60992	

Shipping Weights

Number of Poles	Number per Carton	Shipping Weight (lbs.)
JXD2, JXD6, JD6, HJD6, HHJD6 Assembled Breaker (less terminals)		
2	1	17.5
3	1	19.5
JD6, HJD6, HHJD6 Frame Only		
2	1	14
3	1	15.5
JD6 Trip Unit Only		
2	1	3.5
3	1	4
CJD6 Complete Assembled Breaker (less terminals)		
2	1	29.5
3	1	31.5

For inches / millimeters conversion, see Application Data section.

■ Built to order. Allow 2-3 weeks for delivery. 2-pole units available in 3-pole construction.

① When wired as shown on page 11/3, this circuit breaker is UL listed and rated for use on 500V DC ungrounded UPS systems only.

② For non-interchangeable 3-pole HJD6 or HHJD6 type circuit breaker change the prefix identifier to HJXD6 or HHJXD6. Price equals price of frame plus price of trip, e.g. price of HJXD63B400 equals price of HJD63F400 plus price of JD63T400. Order lugs separately.

③ JXD6-ETI, CJD6-ETI see page 11/50 for ordering information.

④ Type HJXD6, HHJXD6 Circuit Breakers are UL listed for reverse fed applications.

⑤ CE applies to non-interchangeable type HJXD only.

⑥ HACR rated.