

# Circuit Breakers

## Duplex, Triplex and Quadplex Plug-In Breakers

### Selection

#### Duplex Circuit Breakers

Breaker Type	Ampere Rating	Catalog Number	List Price \$	Catalog Number	List Price \$
<b>QT</b> 1-Pole 10K AIC 120V AC	15-15	Q1515	66.00	Q1515NC <sup>①</sup>	109.00
	15-20	Q1520	66.00	Q1520NC <sup>①</sup>	109.00
	20-20	Q2020	66.00	Q2020NC <sup>①</sup>	109.00
	20-30	Q2030	66.00	—	78.00
	15-30 ■	Q3015	66.00	—	78.00
	20-30	Q3020	66.00	—	78.00
	30-30	Q3030	66.00	Q3030NC <sup>①</sup>	109.00
<b>SHIPPING:</b> 12 per carton, (Wt. 4.8 lbs.)					

#### Triplex Circuit Breakers


Breaker Type	Ampere Rating		Catalog Number	List Price \$
	Single Pole	Common-Trip 2-Pole		
<b>QT</b> 2-Pole 10K AIC 120/240V AC Center Common Trip	15	15	Q21515CT	128.00
	15	20	Q21520CT	128.00
	15	25	Q21525CT ■	128.00
	15	30	Q21530CT	128.00
	15	35	Q21535CT ■	128.00
	15	40	Q21540CT	128.00
	15	45	Q21545CT ■	128.00
	15	50	Q21550CT	128.00
	20	20	Q22020CT	128.00
	20	25	Q22025CT ■	128.00
	20	30	Q22030CT	128.00
	20	35	Q22035CT ■	128.00
	20	40	Q22040CT	128.00
	20	45	Q22045CT ■	128.00
	20	50	Q22050CT	128.00
	30	30	Q23030CT	128.00
	<b>SHIPPING:</b> 6 per carton, (Wt. 4.9 lbs.)			

#### Quadplex Circuit Breakers

Breaker Type	Ampere Rating		Catalog Number	List Price \$
	Inside 2-Pole	Outside 2-Pole		
<b>QT</b> 2-Pole 10K AIC 120/240V AC Common Trip	15	15	Q21515CT2	132.00
	15	20	Q22020CT2	132.00
	20	30	Q23020CT2	132.00
	20	40	Q24020CT2	132.00
	30	30	Q23030CT2	132.00
	30	40	Q24030CT2	132.00
	40	40	Q24040CT2	132.00
	50	30	Q23050CT2	132.00
<b>SHIPPING:</b> 6 per carton, (Wt. 4.8 lbs.)				


#### QT Accessories

Description	Catalog Number	List Price \$
Handle Block	ECBX231M	9.20

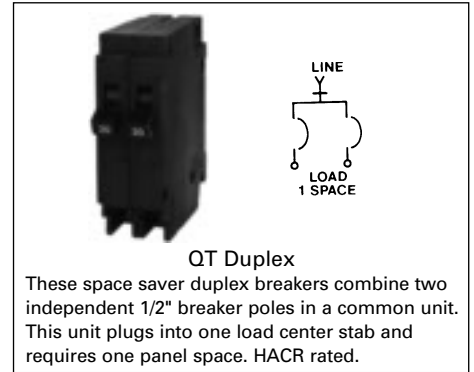


**QT Duplex**

These space saver duplex breakers combine two independent 1/2" breaker poles in a common unit. This unit plugs into one load center stab and requires one panel space. HACR rated.

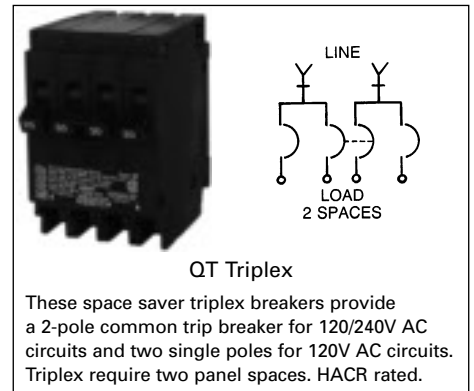

**QT Triplex**

These space saver triplex breakers provide a 2-pole common trip breaker for 120/240V AC circuits and two single poles for 120V AC circuits. Triplex require two panel spaces. HACR rated.

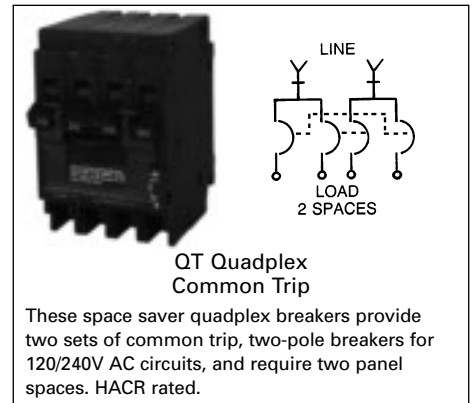

**QT Quadplex Common Trip**

These space saver quadplex breakers provide two sets of common trip, two-pole breakers for 120/240V AC circuits, and require two panel spaces. HACR rated.

For inches / millimeters conversion, see Application Data section.

■ Built to order. Allow 2-3 weeks for delivery.

① Non-CTL. For replacement use only in panels manufactured before 1968

# RESIDENTIAL Product

## NEWS

### Type QT Circuit Breakers

#### Features and Benefits

- 1/2 inch width-per-pole construction: dual and quad styles.
- Requires 1/2 the space of 1 inch width circuit breakers.
- SWD rated — 15 and 20 amp.
- HACR rated.
- UL listed.
- CSA certified.

Siemens type QT dual circuit breakers are 1 inch wide and consist of (2) 1-pole breakers, in varying combinations of ampere ratings from 15 to 30 amp.

Type QT quad circuit breakers are 2 inches wide and consist of either (1) 2-pole and (2) 1-pole, or (2) 2-pole breakers. 2-pole constructions range from 15-50 amps and are available with internal common trip.



Q1515

Q22020CT2

All type QT circuit breakers are plug-in style and load terminals are provided with the units. They are rated for 120/240V AC and calibrated for 40°C maximum ambient applications. The standard interrupting rating is 10k AIC.

Breaker Type	Dimensions (Inches)		
	Length	Width	Depth
Dual	3-1/8	1	3
Quad	3-1/8	2	3

# Selection Information

## QT Dual Breaker, (2) 1-Poles 10k AIC Interrupting Rating

Ampere Rating	Complete Breaker Unenclosed	Wire Range	
	Catalog Number	Cu	Al
15-15	<b>Q1515</b> <sup>①</sup>	#14 - #8	#12 - #8
15-20	<b>Q1520</b> <sup>①</sup>	#14 - #8	#12 - #8
20-20	<b>Q2020</b> <sup>①</sup>	#14 - #8	#12 - #8
20-30	<b>Q2030</b>	#14 - #6	#12 - #6

**SHIPPING:** 12 per carton, 48 per master carton (Wt. 20 lbs.)

## QT Quad Breaker, (1) 2-Pole & (2) 1-Poles,<sup>②</sup> Common Trip 10k AIC Interrupting Rating

Ampere Rating	Complete Breaker Unenclosed	Wire Range	
	Catalog Number	Cu	Al
15-15	<b>Q21515CT</b>	#14 - #8	#12 - #8
15-20	<b>Q21520CT</b>	#14 - #8	#12 - #8
15-25	<b>Q21525CT</b>	#14 - #8	#12 - #8
15-30	<b>Q21530CT</b>	#14 - #6	#12 - #6
15-40	<b>Q21540CT</b>	#8 - #6	#8 - #4
15-50	<b>Q21550CT</b>	#8 - #6	#8 - #4
20-20	<b>Q22020CT</b>	#14 - #8	#12 - #8
20-30	<b>Q22030CT</b>	#14 - #6	#12 - #6
20-40	<b>Q22040CT</b>	#8 - #6	#8 - #4
20-50	<b>Q22050CT</b>	#8 - #6	#8 - #4

**SHIPPING:** 6 per carton, 24 per master carton (Wt. 20 lbs.)

① For Non-CTL version, add "NC" to end of catalog number.

② The 1-pole circuit breakers are always 15 or 20 amp.

Example: The Q21540CT is (1) 2-pole, 40 amp and (2) 1-pole, 15 amp.

## QT Quad Breaker, (2) 2-Poles, Non-Common Trip 10k AIC Interrupting Rating

Ampere Rating	Complete Breaker Unenclosed	Wire Range	
	Catalog Number	Cu	Al
15-15	<b>Q21515</b> <sup>①</sup>	#14 - #8	#12 - #8
20-20	<b>Q22020</b> <sup>①</sup>	#14 - #8	#12 - #8
30-20	<b>Q23020</b>	#14 - #6	#12 - #6
30-30	<b>Q23030</b>	#14 - #6	#12 - #6
30-50	<b>Q23050</b>	#8 - #6	#8 - #4
40-20	<b>Q24020</b>	#8 - #6	#8 - #4
40-30	<b>Q24030</b>	#8 - #6	#8 - #4
40-40	<b>Q24040</b>	#8 - #6	#8 - #4

**SHIPPING:** 6 per carton, 24 per master carton (Wt. 20 lbs.)



## QT Quad Breaker, (2) 2-Poles, Common Trip 10k AIC Interrupting Rating

Ampere Rating	Complete Breaker Unenclosed	Wire Range	
	Catalog Number	Cu	Al
15-15	<b>Q21515CT2</b>	#14 - #8	#12 - #8
20-20	<b>Q22020CT2</b>	#14 - #8	#12 - #8
30-20	<b>Q23020CT2</b>	#14 - #6	#12 - #6
30-30	<b>Q23030CT2</b>	#14 - #6	#12 - #6
30-50	<b>Q23050CT2</b>	#8 - #6	#8 - #4
40-20	<b>Q24020CT2</b>	#8 - #6	#8 - #4
40-30	<b>Q24030CT2</b>	#8 - #6	#8 - #4
40-40	<b>Q24040CT2</b>	#8 - #6	#8 - #4

**SHIPPING:** 6 per carton, 24 per master carton (Wt. 20 lbs.)

# Knockout Diagrams

## Quad (Dual would be same profile, but 1" wide) Dimensions (Inches)

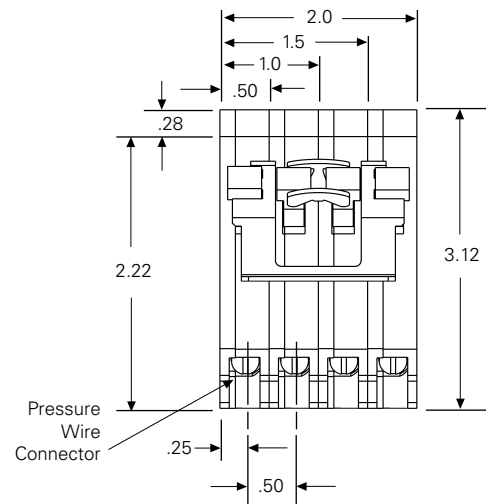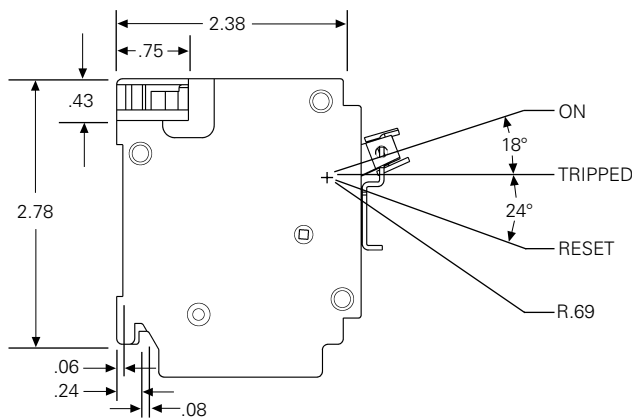

Siemens Energy & Automation, Inc.  
Residential Products  
5400 Triangle Parkway  
Norcross, GA 30092  
www.sea.siemens.com